

## CQ-12T and CQ-18T Rack Kit

### Fitting Note

The **CQ12T-RK19** and **CQ18T-RK19** kits contain the rack ears and fixing screws required to mount either a **CQ-12T** or **CQ-18T** mixer in a standard 19" rack or case.

Before continuing, ensure that you have the correct kit for your mixer. The width of each ear is approximately 4" (or 100mm) in the **CQ12T-RK19** kit and approximately 3" (75mm) in the **CQ18T-RK19** kit.

#### Contents

##### CQ12T-RK19

Item Code	Description	Quantity
AA12670-L	RACK EAR CQ12T 19" LEFT	1
AA12670-R	RACK EAR CQ12T 19" RIGHT	1
AB0332	SCREW M4X8 PAN TORX BK	4

##### CQ18T-RK19

Item Code	Description	Quantity
AA12669-L	RACK EAR CQ18T 19" LEFT	1
AA12669-R	RACK EAR CQ18T 19" RIGHT	1
AB0332	SCREW M4X8 PAN TORX BK	4

#### Tools required




Torx® T20 driver

### Fitting ears to the unit

1. Place the CQ face down on a padded surface, taking care not to put undue pressure on the encoders or touchscreen.
2. Line up the rack ears with the unused screw holes at either side of the CQ, near to the rubber feet, so that the front panel of the ears are parallel to the front of the CQ. Each ear will only align correctly with one side.
3. Secure each rack ear using two of the provided M4 Torx® screws.

① Use only the supplied fixings to attach the rack ears to the CQ. Using other fittings may cause damage to the unit and/or rack ears.

① When fitted, there will be a small gap between the ears and sides of the CQ to prevent damage to either.

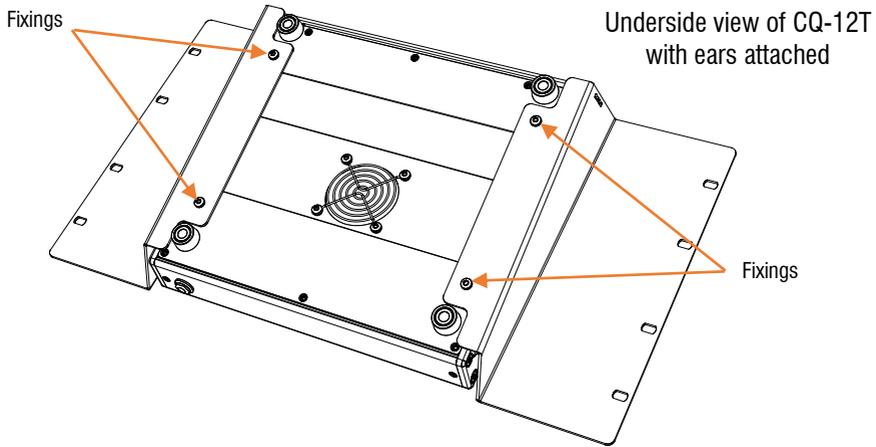

## Mounting in a rack or case

- Ensure that there is adequate ventilation around the underside of the CQ where the cooling fan is located.
- A minimum of 6U is required in the rack or case. This is the size of the rack ears and includes space for connection of the power supply.
- Extra space is required at the front of the unit to allow for connection of headphones.
- Extra space at the rear may be required for access to the power switch, though this can be left on and power can be switched at the mains - as long as the correct shutdown procedure is carried out on the CQ.
- A point for cable tying the power connection to the rack ears is provided to help prevent accidental disconnection.

For further assistance please contact support - <https://support.allen-heath.com>

Read the Safety Instructions Sheet included with the product and the information printed on the panel before operating.

A limited one-year manufacturer's warranty applies to this product, the conditions of which can be found at: [www.allen-heath.com/legal](http://www.allen-heath.com/legal)

By using this Allen & Heath product and the software within it you agree to be bound by the terms of the relevant End User Licence Agreement (EULA), a copy of which can be found at: [www.allen-heath.com/legal](http://www.allen-heath.com/legal)

Register your product with Allen & Heath online at: <http://www.allen-heath.com/support/register-product/>

Check the Allen & Heath website for the latest documentation and software updates.

# ALLEN & HEATH

[www.allen-heath.com](http://www.allen-heath.com)