

SYSTEMS AND CONTROL / VOICE ALARM EN 54 / COMPACT

SEVEN-1500NR

VOICE ALARM SYSTEM AND EN 54 COMPACT PUBLIC ADDRESS SYSTEM, 3X500 W, 3 SIMULTANEOUS MESSAGES AND 2XSFP CONNECTION



- ✓ Compact rack-mountable system
- ✓ 16 loudspeaker lines With 3 simultaneous messages
- ✓ Distributed architecture in TCP/IP network with fibre-in-ring connection
- ✓ Scalable with up to 254 networked devices
- ✓ EN 54-16 and EN 54-4 certified



+ Info:
<https://fonestar.com/SEVEN-1500NR>

ESPECIALLY RECOMMENDED IN:



Retail

Social and health
centers

Hotels



All sectors

DESCRIPTION

All-in-one compact voice alarm and public address system, EN 54, 3 x 500 W RMS, 16 speaker zones. Connection with SFP fibre

TECHNICAL CHARACTERISTICS

FEATURES	Compact all-in-one public address and voice alarm system EN 54. Based on TCP/IP distributed data network architecture. Network card with SFP fibre optic connectors for ring connection. Integrated DSP, high audio quality. Evacuation functions, alerts, message player and background music. 3 simultaneous messages with 512 MB SDHC internal memory (20 minutes) expandable up to 32 GB. 4'3" touch screen and 4 programmable buttons. Speaker line impedance monitoring. Monitoring and failure detection. Easy installation and commissioning. Rack or desktop installation. Simple and intuitive PC configuration software. In compliance with EN 54-16 and EN54-4.
ZONES	16 loudspeaker lines
POWER	3x 500 W RMS
RESPONSE	20-22,000 Hz (@ 0.5 dB/ -3 dB)
INPUTS	1 communication micro, DIN 5 1 stereo input, Euroblock, 10 kOhm 3 V RMS 7+2 GPI, Euroblock 1 battery temperature sensor, jack 3'5 mm 1 LAN: Interconnection of equipment, RJ45 1 LAN PoE: Interconnection of PoE powered equipment, RJ45 1 LAN/WAN: Network connection, RJ45 2 FIBER: Safety connection (redundant ring) for SC/LC connectors. SPF connector
OUTPUTS	16 speaker lines 100 V, Euroblock 2 local audio BUS 1 and 2 line outputs for 4-line control card operation 1 stereo output, Euroblock, 1 V RMS Two auxiliary power outputs, 24 V CC, 150 mA and 48 V CC, 350 mA 3+2 GPO, Euroblock



+ Info:



<https://fonestar.com/SEVEN-1500NR>

TEMPERATURE	Operation: -5°C ~ 40°C Storage: -20°C ~ 70°C
HUMIDITY	15% ~ 80% (non-condensing)
POWER SUPPLY	110-240 V CA, 50/60Hz, 1.600 W (Control unit +48 V CC Battery, Euroblock)
DIMENSIONS	480 x 176 x 354 mm depth, 4U 19" rack
WEIGHT	14 kg
ACCESSORIES	Communications microphone (firefighter) Battery cable AC power cable



+ Info:

<https://fonestar.com/SEVEN-1500NR>

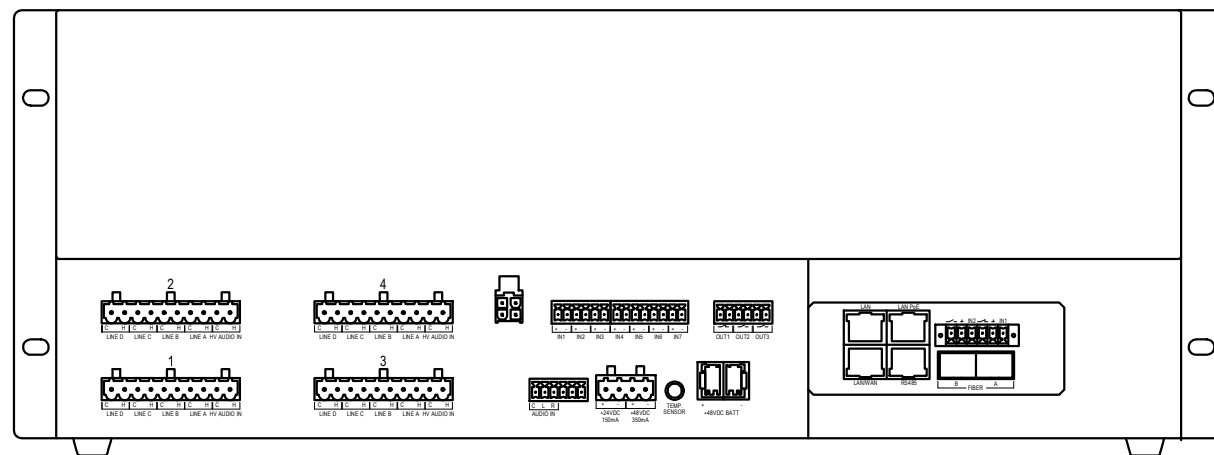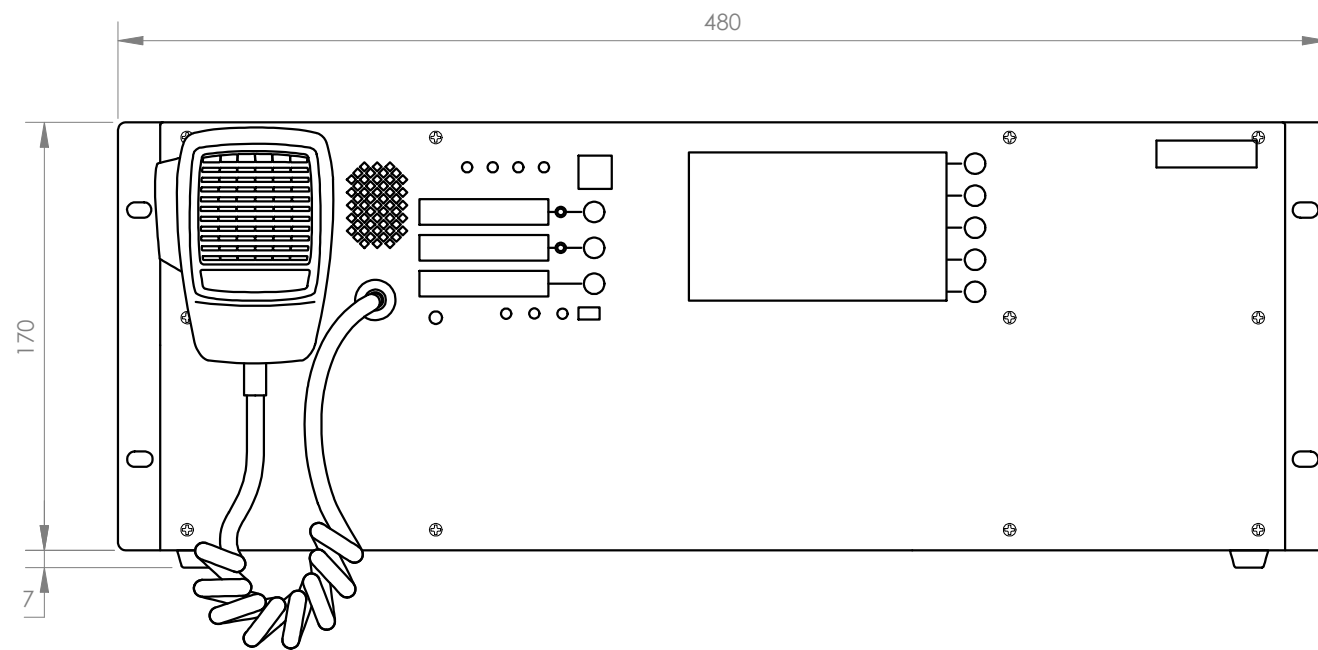

FONESTAR

Model
SEVEN-1500NR

Description
SEVEN COMPACT ALL-IN-ONE RACK-MOUNTABLE PUBLIC ADDRESS
AND VOICE ALARM SYSTEM EN 54 WITH SFP FIBRE, 3 X 500 W

Units
mm

Scale
1:3