# **TG H56**

## Condenser Microphone





TG H56 tan

### **FEATURES**

- High-quality miniature condenser microphone (omnidirectional)
- Splash-proof capsule design
- · Lightweight adjustable neckband
- Microphone boom can be worn on the left or right hand side
- Flexible and rugged construction

### **APPLICATIONS**

The TG H56 microphone commands but does not attract attention – in other words, a commanding and balanced sound meets a subtle appearance. The splash- and sweat-proof omnidirectional microphone can be mounted on either side and, thanks to the variable microphone arm, can be positioned with precision – benefits that come into their own when the microphone is used for musicals, theatre or sport. The connecting cable is detachable due to a screwed fitting and can be replaced by another cable at any time

The TG H56 microphone is available in two versions:

as Opus version it can be connected to the Opus series beltpack transmitters; as TG version it can be used with the wireless microphone systems of the TG series.

For wired applications with phantom power sources the TG H56 must be used with an optional power adapter.

Available in black or beige.

## **TECHNICAL SPECIFICATIONS**

Transducer type	Condenser (back electret)
Operating principle	Pressure
Polar pattern	Omnidirectional
Frequency response	20 - 20,000 Hz
Open circuit voltage	4 mV/Pa (-48 dBV)* $\pm$ 3 dB
Nominal impedance	1 kΩ
Max. SPL	127 dB SPL*
Signal-to-noise ratio	47 dB [CCIR, Q-Peak]*
Equivalent SPL	35 dB [A, RMS]*
Power supply	Direct current
Max. power consumption	0.5 mA
Supply voltage	2 - 9 V
Connector	Mini-XLR, 4-pin, female
Dimensions:	
Capsule diameter	3 mm
Cable length	1.2 m
Weight (with cable/connector)	18 g

<sup>\*</sup>measured with MA-PVA

#### SUPPLIED ACCESSORIES

WS 56 blk	Wind shield, black	Order # 708.887
	or	
WS 56 tan	Wind shield, beige	Order # 708.879

Power adapter to connect to phantom-powered microphone

# **OPTIONAL ACCESSORIES**

Versions		MA-PVA	inputs, for microphones with  Opus pin assignment Order # 475.378  Power adapter to connect to
TG H56 (Opus)	Condenser headset microphone,		phantom-powered microphone inputs, for microphones with
	omnidirectional, black, with female		TG pin assignment Order # 711.098
	4-pin Mini-XLR connector Order # 708.402	WS 56 blk	Wind shield, black Order # 708.887
TG H56 tan (Opus)	same as above, but beige Order # 708.410	WS 56 tan	Wind shield, beige Order # 708.879
TG H56 (TG)	Condenser headset microphone,	MA-C H56 (Opus)	Connecting cable, black Order # 708.836
	omnidirectional, black, with female	MA-C H56 tan (Opus)	Connecting cable, beige Order # 708.852
	4-pin Mini-XLR connector Order # 705.888	MA-C H56 (TG)	Connecting cable, black Order # 708.844
TG H56 tan (TG)	same as above, but beige Order # 705.853	MA-C H56 tan (TG)	Connecting cable, beige Order # 708.860

CV 18


1 of 2




# **TG H56**

## FREQUENCY RESPONSE & POLAR PATTERN

This polar pattern and frequency response curve (measuring tolerance ± 3 dB) correspond to a typical production sample for this microphone.

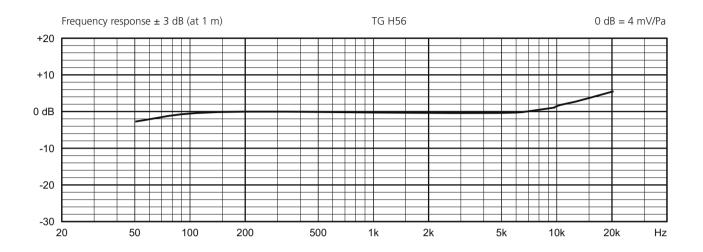

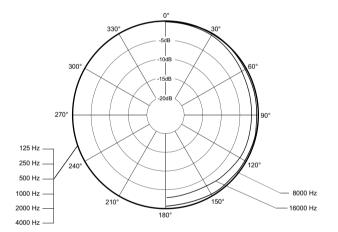

# WIRING DIAGRAMS

