

# Unica™

## 4-Channel Fixed Installation Amplifier Platform



The Unica™ Series is a compact, 1RU amplifier platform developed primarily for installed applications. The 4-channel version includes 5kW, 9kW, 12kW, and 16kW total power models, making Unica™ one of the most power-dense solutions available.

The output channels can drive Lo-Z and 70/100V lines seamlessly, delivering up to 5200W @ 4Ω for the 16kW model, when asymmetrically loaded. The power supply allows worldwide operation (100-240VAC), and it is equipped with the latest generation of single-stage power factor correction (PFC). The proprietary Smart Rails Management (SRM) allows the supply rails to adapt in real time to the required output voltage to

maximize efficiency and reduce idle losses.

Unica™ platform features Powersoft's next-generation DSP for state-of-the-art processing and audio performance. The three 1Gb Ethernet ports, along with the native Dante™ and AES67 support allow for different network topologies including daisy-chain and Dante™ redundant.

The front panel display allows quick access to the amplifier operating status information for local monitoring. The PoE (Power over Ethernet) input allows for short recovery time in case of mains loss, as well as testing and monitoring loudspeakers 24/7 without the need for mains power.


Lastly, Unica™ Series amplifiers natively support cloud connectivity for remote monitoring and control from any device anywhere in the world via the Powersoft Cloud.

- ▶ Medium to large-scale venues
- ▶ Main systems, central or distributed, subwoofers, hi-Z/lo-Z
- ▶ Mission critical applications
- ▶ Theatres, performance venues
- ▶ Houses of worship
- ▶ Convention centres
- ▶ Business centres
- ▶ Cruise ships



# Unica™

## 4-Channel Fixed Installation Amplifier Platform

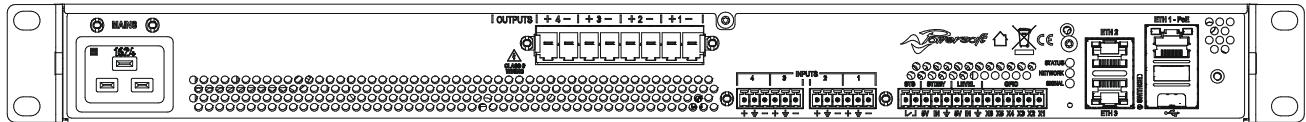

## Specifications

Channel Handling		
Number of output channels	4 Hi-Z or Lo-Z (bridgeable per ch. pair)	Phoenix PC 5/8-STF1-7,62
Number of input channels		
Analog	4	Phoenix MC 1,5/6-ST-3,81
Dante™/AES67	4	3 x RJ45
Audio		
Default gain	32 dB	
	9K4	12K4
Input sensitivity	3.0 V <sub>rms</sub> 11.8 dBu	3.5 V <sub>rms</sub> 13 dBu
Output noise floor (Analog Input)	-72 dBV(A) typical	
SNR (Analog Input)	113.6 dB(A)	114.8 dB(A)
Output noise floor (Dante™/AES67 Input)	-76 dBV(A) typical	
SNR (Dante™/AES67 Input)	117.6 dB(A)	118.8 dB(A)
Max input level	>+24 dBu	
Frequency Response	20 Hz - 20 kHz +0.0 dB/-1.0 dB, @ 8 Ω	
Crosstalk	<-80dB typical, 20Hz to 1 kHz range <-60dB @20kHz typical	
Input impedance	20 kΩ balanced	
THD+N (from 0.1 W to Half Power)	< 0.05%	
SMPTE IMD (from 0.1 W to Half Power)	< 0.01%	
Damping factor	>2500 20Hz to 500 Hz	
DSP		
AD converters	24 Bit Tandem™ @ 48 kHz 130 dB(A) Dynamic Range - 0.00005 % THD+N	
DA converters	24 Bit Tandem™ @ 48 kHz 132 dB(A) Dynamic Range - 0.00003 % THD+N	
Latency	2.6 ms analog Input to amplifier Output	
Onboard memory	Store and recall up to 50 amplifier snapshot	
Delay	2 s (input) + 100 ms (output) for time alignment	
Equalizer	Raised-cosine, custom FIR, parametric IIR: peaking, hi/lo-shelving, all-pass, band-pass, band-stop, hi/lo-pass	
Crossover	Linkwitz-Riley, Bessel: 6 dB/oct to 48 dB/oct (IIR)	
Limiters	RMS voltage, RMS current, Peak limiter, TruePower™, Dynamic EQ	
Damping control	Active DampingControl™	
Loudspeaker diagnostic	Pilot tone monitoring, average impedance monitoring, load impedance measurement	
Startup time	<0.5 s (with PoE backup power)	
Construction		
Dimensions	489 x 400 x 44.3 (WxDxH) mm 19.3 x 15.8 x 1.7 (WxDxH) in	
Weight	8 Kg (17.6 lb)	
IP Class	IP 20	
Environmental		
Operating temperature range	0°C to +50°C (derating above 35°C)	
Storage relative humidity range	10% to 85% humidity (non condensing)	

Data subject to change without notice.

Output Stage		5K4	9K4	12K4	16K4				
Commercial total rated power		5000	9000	12000	16000	W			
per channel @ 100 V (symmetrical)*		1250	2250	3000	4000	W			
per channel @ 70 V (symmetrical)*		1250	2000	2500	3000	W			
per channel @ 16 Ω (symmetrical)*		700	900	1100	1300	W			
per channel @ 8 Ω (symmetrical)*		1250	1600	2000	2500	W			
per channel @ 4 Ω (symmetrical)*		1250	2250	3000	4000	W			
per channel @ 2 Ω (symmetrical)*		1250	2000	3000	4000	W			
per bridged pair @ 8 Ω (symmetrical)*		2500	4500	6000	8000	W			
per bridged pair @ 4 Ω (symmetrical)*		2500	4000	6000	8000	W			
per channel @ 100 V (asymmetrical)**		1800	3200	4000	5000	W			
per channel @ 70 V (asymmetrical)**		1500	2500	3000	3500	W			
per channel @ 16 Ω (asymmetrical)**		700	900	1100	1400	W			
per channel @ 8 Ω (asymmetrical)**		1250	1600	2000	2700	W			
per channel @ 4 Ω (asymmetrical)**		1800	3200	4000	5200	W			
per channel @ 2 Ω (asymmetrical)**		1800	2500	3500	4500	W			
Maximum unclipped output voltage		140	170	195	220	V <sub>peak</sub>			
Maximum output current		50	60	70	80	A <sub>peak</sub>			
*; Available by driving and loading all the channels symmetrically.									
**; Maximum power-sharing capacity per channel									
Power & Thermal		5K4	9K4	12K4	16K4				
		Input Power	55	55	55	55			
		Idle Current Draw	0.65	0.65	0.65	0.65			
		Thermal Loss	190	190	190	190			
		1/8 Max Power @ 4Ω	869	1463	1951	2600			
		Current Draw	7.68	13.1	17.5	23.2			
		Thermal Loss	833	1147	1528	2046			
		Idle Input Power	62	62	62	62			
		Current Draw	0.52	0.52	0.52	0.52			
		Thermal Loss	211	211	211	211			
@ 115 V		1/8 Max Power @ 4Ω	880	1450	1940	2550			
		Input Power	4.43	6.6	8.8	11.6			
		Current Draw	870	1108	1500	1875			
		Thermal Loss	Power supply	Universal regulated switch mode with PFC and SRM					
		Nominal Voltage	100-240 VAC @ 50/60 Hz (400 VAC surge)						
		Operating Voltage	80-265 VAC @ 50/60 Hz						
		Supply tolerance	+10% -10%						
		Power system	TT/TN						
		Oversupply category	II						
		Class of equipment	I						
@ 230 V		AC Mains connector	IEC C20 inlet (20 A max) region-specific power cord provided						
		Eco Mode consumption	35 W						
		Standby consumption	20 W Typical, CPU fully functional						
		PoE Input	Class 4 or higher						
Networking									
Network		3 x Gigabit Ethernet ports RJ45 connectors							
Network modes		Switched Mode, Split-Redundant Mode							
Remote interface		ArmoniaPlus™, Powersoft Cloud							

