

# WASP-S15

Passive  
subwoofer




WASP has received the most advanced components to assist with task of creating the ultimate compact line-array solution. Thoroughly designed cabinets, most advanced proprietary mounting system, and wide selection of mounting and connectivity accessories was called in to provide the fast mounting\dismounting times, as well as ease of transportation and storage.

The WASP-S15 has been designed to be a reliable low-frequency support for WASP line array. Based on 15" LF woofer, the system delivers 137 dB of sound pressure. Featuring specifically designed integrated hardware, WASP-S15 can be used both in a stack or in a flown cluster.



## DIMENSIONS

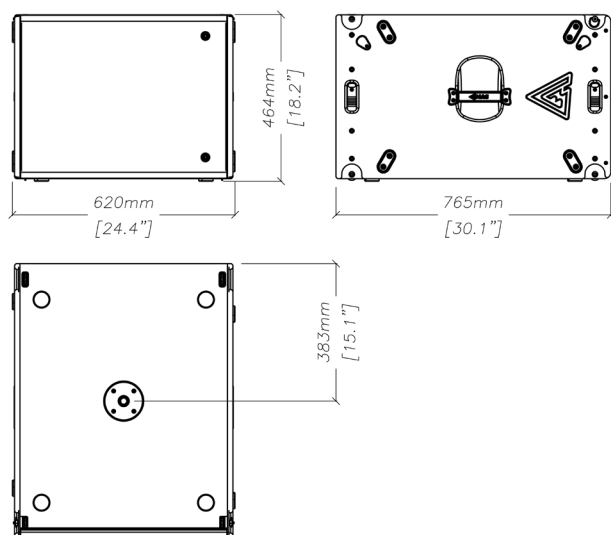


## SPECIFICATIONS


Frequency range (-10dB)	35 - 300 Hz
Peak SPL <sup>1</sup>	137 dB
Sensitivity (1W/1m)	95 dB
LF Driver	15", 4" VC
Impedance	8 Ohm
Nominal power <sup>2</sup>	1000 W
Connectors	2 x Speakon rear 2 x Speakon front
Dimensions (W x H x D)	620 x 464 x 765 mm 24,4" x 18,3" x 30,1"
Weight net / shipping	48,4 kg / 51,5 kg 107 lbs / 114 lbs
Mounting	M20 distance pole adapter Integrated array hardware
Enclosure material	Plywood, wear-resistant paint
Speaker protection	Steel grill, acoustically transparent backing

<sup>1</sup> - pink noise, filtered according to AES 2 - 2012, crest factor 12 dB  
<sup>2</sup> - based on transducer power measured according to AES 2 - 2012


## ACCESSORIES



**Bump-WASP-L**  
Lightweight frame



**Bump-WASP-H**  
Versatile frame



**Bump-WASP-H-CW**  
Transportation Frame

## CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input power ratings mentioned in specifications while exploiting the speaker system.

Speaker system comes with two Neutrik® Speakon heavy duty sockets for easy connection.

Signal +	1 + rear, 2+ front
Signal -	1 - rear, 2- front
Signal through	2+ 2- rear, 1+ 1- front
HPF freq, no less than	30 Hz
HPF order, no less than	18 dB/oct
Recommended amplifier power	1000 - 2000 W on nominal impedance

## SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.

2. Do not use speaker system with damaged speakON or speaker cable so as not to cause electric shock hazard or fire hazard.

3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).

4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.

5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.