



Description

Introducing the Azimut-KAMUT2L14II system - the ultimate audio powerhouse in an incredibly compact package! With two small Lyzard-KZ14I line array loudspeakers, an ultra-compact Truffle-KTR25 subwoofer, a 219x46x170mm Kommander-KA02I amplifier, and a sneaky remote control, the KAMUT2L14II is the compact audio solution of the family.

Not only the Azimut balance analog inputs and fiber optical inputs, it also features plug and play capabilities, Bluetooth connectivity, USB ports, and mini jack input. Plus, with the latest K-array electronics of the new Kommander-KA02I, controlling this system remotely is a breeze! Compatible with any software capable of communicating on the network via REST (Representational State Transfer) commands, which uses the common HTTP protocol, you can even use your smartphone and compatible Apps to easily connect and control the Azimut.

This makes the system perfect to be integrated in domotic environments and smart home solutions, compatible with common control systems, like CRESTRON, CONTROL 4, Q-Sys, and many more. With the Kommander-KA02I, 4x 50W @ 4Ω amplifier platform, Azimut became an even more flexible system counting on pristine sound and complete control over the connected loudspeakers and woofers, like Lyzard-KZ14I.

All the Azimut-KAMUT2L14II components are designed by the K-array R&D department and are custom made under the K-array quality control system in Italy.

Introducing the Lyzards-KZ14I - the smallest line array element featuring PAT (Pure Array Technology). They can fit right into your pocket, and they're built with durable and resistant aluminum enclosures that with new finishes.

With 4x 0.5" high-efficiency driver units and neodymium magnet structure, these speakers deliver maximum excursion and minimal residual noise for exceptional sound quality.

And when integrated with the Truffle-KTR25 subwoofer, the result is a powerful, compact, and resistant complete little sound system that provides the low-end punch you need for sub and bass range.

It's the perfect combination for the ultimate AZIMUT system that not only sounds great but looks great too!

- 2 x KZ14I
- 1 x KTR25
- 1 x KA02I
- 1 x K-REMUCTRL
- compact, discreet, minimal visual impact
- remotely controlled and smart apps compatible
- easy to install
- home, retails, restaurants and cafes applications

Azimut-KAMUT2L14II comes in these premium colors

Azimut-KAMUT2L14II / Black

Azimut-KAMUT2L14II / White

Azimut-KAMUT2L14XII / Custom RAL on request

with this finishes for Lyzards components:

Azimut-KAMUT2L14XGII : 24K Gold plated

Azimut-KAMUT2L14XPII : Polished

Azimut-KAMUT2L14 II

Lyzard-KZ14I

Technical Specifications	
Type	Line Array with PAT
Transducers	4 x 0.5" Neodymium magnet woofers
Frequency Response ¹	500 Hz - 18 kHz (-6 dB)
Max SPL ²	98 dB (peak)
Coverage	V. 40° H. 140°
Power Handling	15 W
Nominal Impedance	16 Ω
Connectors	IN+ IN- screw terminals

Handling & Finishes	
Material	Aluminum
Color	Black, White, Custom RAL
Finishes	24K Gold, Rose Gold, Antique Gold, Polished
IP Rating	IP64
Dimensions (WxHxD)	22 x 100 x 11 mm (0.9 x 3.9 x 0.4 in) 28 x 106 x 11 mm (1.1 x 4.2 x 0.4 in) Recessed version
Weight	0.059 kg (0.130 lb)

¹ With dedicated preset.

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.

Truffle-KTR25

Technical specifications	
Type	passive subwoofer
Transducers	5.26" ferrite magnet woofer w/ 1" voice coil + 4" passive radiator
Frequency Response ¹	45 Hz - 150Hz / 500 Hz (-6dB)
Max SPL ²	115 dB peak
Coverage	Omni
Power handling	60 W
Nominal Impedance	4 Ω
Crossover	external crossover required
Connectors	2PIN euroblock connector (included)

Handling & Finishes	
Material	Aluminum
Colors	Black, Custom RAL
IP Rating	IP64
Finishes	Powder Matte
Dimensions (WxHxD)	152 x 147 x 258 mm (6.0 x 5.8 x 10.2 in)
Weight	2.5 kg / (3.1 lb)

¹ With dedicated preset.

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.

Kommander-KA02I

Technical Specifications	
Type	4ch switching mode, Class D Amplifier
Output Power ¹	4 x 50 W @ 4 Ω
Frequency Response	20 Hz - 20 kHz (±1 dB)
Built-in DSP	Grouping, equalization, limiters, routing, level, loudspeaker presets
MAINS operating range	Dedicated AC/DC power adapter 100-240V ~ AC, 50-60Hz input / 24V, 4 A
Impedance	minimum 4 Ω (2 Ω PBTL)
Protections	Over Temp. (Power Limiting - Thermal Shutdown), Short Circuit/ Overload Output Protection, Power Limiting, Clip Limiter/ Permanent Signal Limiter, High Frequency Protection
Power Consumption	20 W @ 4 Ω load, 1/8 Rated Power (Pink Noise)

Handling & Finishes	
Material	Aluminum
Color	Black
IP Rating	IP20
Dimensions (WxHxD)	219 x 46 x 170 mm - (8.6 x 1.8 x 6.7 in)
Weight	0,7 kg (1.5 lb)

¹ EIAJ test standard


Notes:
Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.
New materials and designs are introduced into existing products without previous notice.
Present systems may differ in some respects from those presented in this catalog.

Connections and Remote Control	
Input	4x BAL input: Euroblock 1.5/ 3-ST-3.81, 3.5 mm jack unBAL analog stereo AUX input, TOSLINK optical input
Output	2x Euroblock 2,5/ 4-G-5,08
Digital	4x USB-A 2.0, 1x RJ45 Ethernet, Bluetooth 4.1 Low Energy, Wi-Fi IEEE 802.11 b/g/n
Remote Control	Wi-Fi dedicated K-array Connect mobile app Ethernet wired K-framework3 multiplatform design and tuning software
Compatible Control Systems	CRESTRON, CRESTRON HOME, Q-SYS, CONTROL4, AMX by HARMAN




Azimut-KAMUT2L14 II

Lyzard-KZ14 I

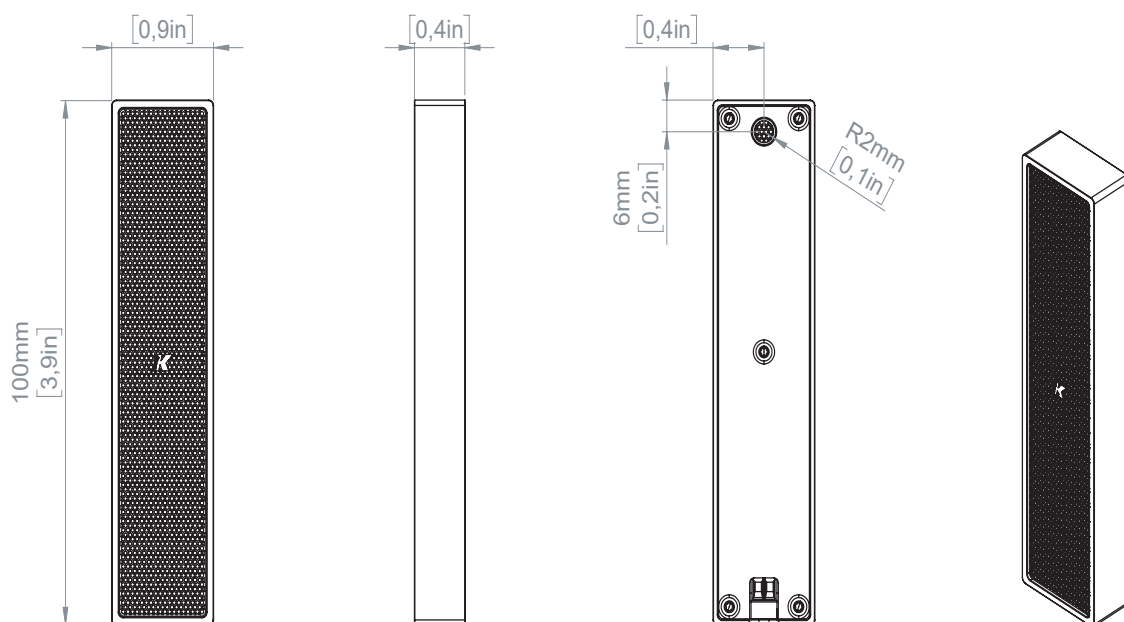

Truffle-KTR25

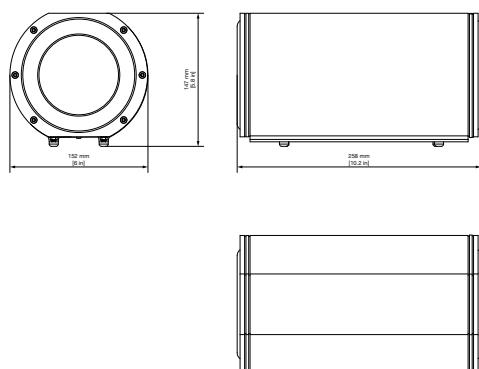

Kommander-KA02 I

