


ELX200-12P 12" 2-Way Powered Speaker

- EV QuickSmart Mobile application: quickly and wirelessly configure, control and monitor up to six ELX200 loudspeakers simultaneously, and receive immediate notification during critical performance conditions. Bluetooth® is available in select countries.
- QuickSmartDSP features best-in-class processing. Easy setup via four presets, sub/top system-match, three-band EQ, five user-programmable presets, visual monitoring of limiter status, input level control and meters, and master volume control to optimize gain structure, all via LCD.
- High-efficiency 1200 W Class-D power amplifier delivers up to 130 dB peak SPL utilizing transducers designed and engineered by EV.
- EV-patented Signal Synchronized Transducers (SST) waveguide design provides precise and consistent coverage, minimal distortion, and maximized acoustical loading.
- Professional-grade hardware: three M10 threaded mounting points for forged eyebolts, integrated pole-mounts and the proven ZLX three-handle design for easy lifting.

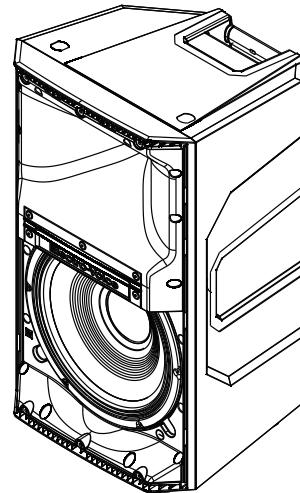

ELX200-12P features high-efficiency Class-D power amplifiers (up to 1200 W) with integrated QuickSmartDSP, and delivers up to 130 dB SPL utilizing transducers designed and engineered by EV (12-inch EVS-12M woofer coupled with a DH-1L 1-inch titanium compression driver). Powered full-range models allow easy setup via four presets (Music, Live, Speech, Club), sub/top system-match crossovers, three-band EQ, five user-programmable presets (Store and Recall settings), visual monitoring of limiter status, input level control and meters, and master volume control to ensure optimal gain structure. ELX200 powered models are ideal for portable and installed applications, with lightweight and durable polypropylene enclosures, three M10 threaded mounting points and the proven ZLX handle design for easy lifting.

The new QuickSmart Mobile wireless control and monitoring application, using Bluetooth® Low Energy (BTLE) technology, allows intuitive system control, configuration and monitoring of up to six powered ELX200 loudspeakers simultaneously. Receive alerts when your system is being overdriven, and control your system while in front of your speakers, not behind. Bluetooth® is available in select countries.

System overview

Full-Range loudspeaker amplifier panel:




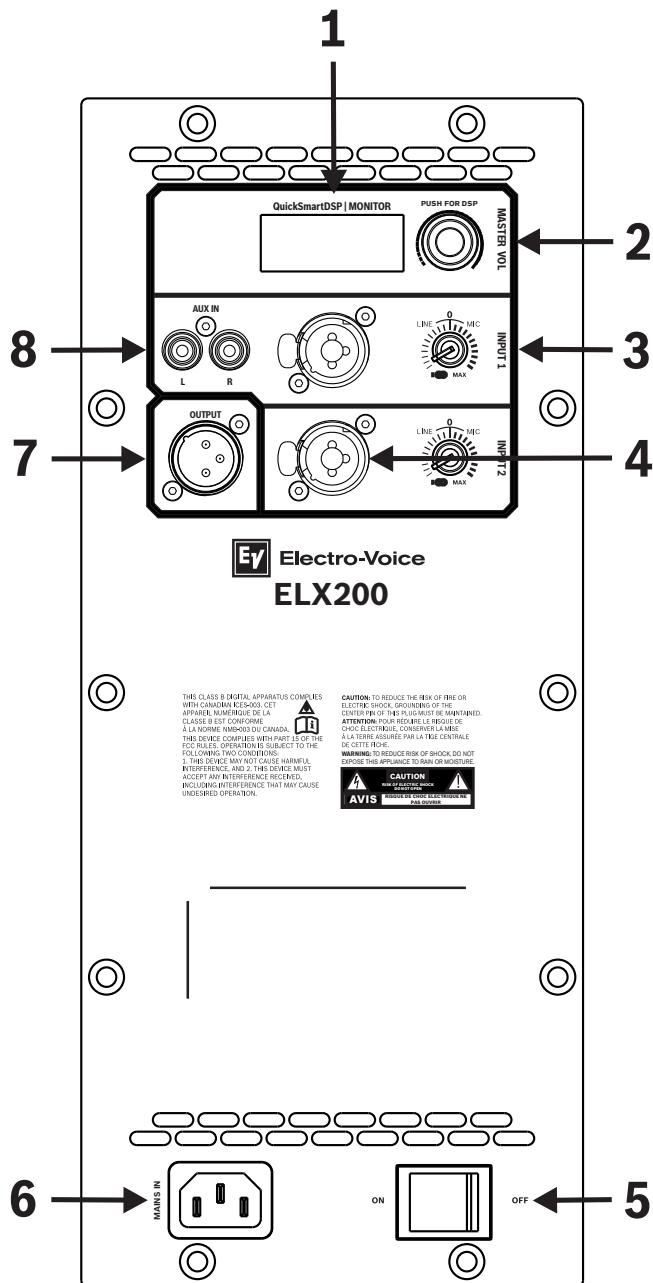


Fig. 1:

- 1**: LCD - DSP control and monitoring interface.
- 2**: MASTER VOL - Adjusts the sound level. DSP - Scroll through the menu and select the available choices. Push the MASTER VOL knob to enter the DSP menu.
- 3**: INPUT LEVEL - Level control for adjusting the individual inputs' level. The 12 o'clock position is unity gain (no gain or attenuation), the range to the left of zero (0) is for adjusting line level sources, and the range to the right of zero (0) is for adjusting microphone levels. LINE and MIC input level control is available for both INPUT 1 and INPUT 2.
- 4**: INPUT - Balanced input for the connection of signal sources like mixing consoles, instruments, or microphones. Connections can be established using 1/4 inch TRS or XLR connectors.
- 5**: POWER - AC switch for switching the power ON or OFF. The LCD screen lights up when the power is turned ON, after approximately 3 seconds.
- 6**: MAINS IN - AC connection is established via an IEC-connector.
- 7**: OUTPUT - XLR output sends the mix of both input signals to another loudspeaker or subwoofer. INPUT LEVEL controls the signal level to OUTPUT. The MASTER VOL or DSP control settings do not affect OUTPUT.
- 8**: AUX INPUT - Stereo unbalanced RCA inputs for connecting external audio media devices, such as MP3 players. Both RCA inputs are summed and can be controlled with INPUT 1 level. The inputs can be used simultaneously with XLR/TRS INPUT 1.

For more information, see ELX200 Powered Loudspeakers Installation manual (F.01U.326.891).

Dimensions:

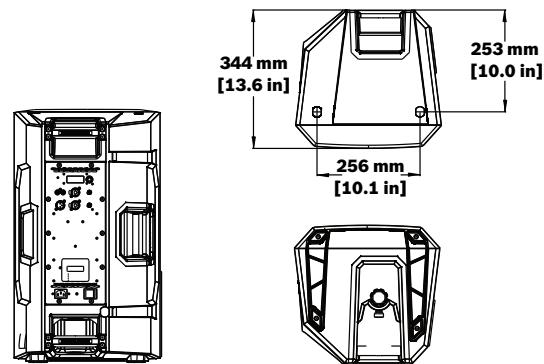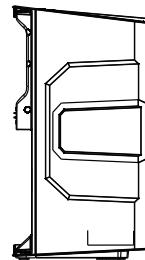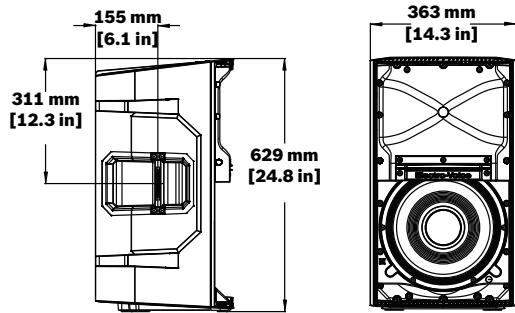

i Notice

Electro-Voice loudspeakers and rigging accessories should be suspended overhead only in accordance with the procedures and limitations specified in the user documentation and installation manual. Electro-Voice products should be suspended with certified rigging hardware by an authorized rigging professional and in complete compliance with local, state, and federal overhead suspension ordinances.

Technical specifications

Frequency response (-3 dB)¹: 57 Hz - 16 kHz

Frequency range (-10 dB)¹: 51 Hz - 20 kHz

Maximum SPL²: 130 dB

Coverage (H x V): 90° x 60°

Power rating: 1200 W

LF transducer: EVS-12M 300 mm (12 in)

HF transducer: DH-1L 1-inch titanium compression driver

Crossover frequency: 1700 Hz

Connectors: (1) Stereo RCA Input, (2) XLR/TRS combo jack, and (1) XLR

Enclosure: Polypropylene

Grille: 18 AWG steel with powdercoat

Suspension: (3) M10 suspension points

Color: Black or white

Dimensions (H x W x D): 629 mm x 363 mm x 344 mm
(24.8 in x 14.3 in x 13.6 in)

Net weight: 15.6 kg (34.4 lb)

Shipping weight: 17.7 kg (39.1 lb)


Power consumption³: 100 - 240 V~, 50 - 60 Hz, 1.2 - 0.6 A

¹Full-space measurement using music DSP preset.

²Maximum SPL is measured at 1 m using broadband pink noise at maximum output.

³Current rating is 1/8 power.

Frequency response:

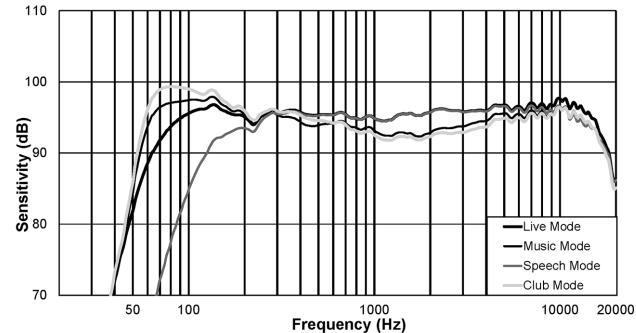

Ordering information

ELX200-12P-US 12" 2-way powered speaker, US cord

Powered 12-inch 2-way loudspeaker US cord, black

Order number **ELX200-12P-US | F.01U.326.040**

Z.01X.000.112

ELX200-12P-EU 12" 2-way powered speaker, EU cord

Powered 12-inch 2-way loudspeaker EU cord, black

Order number **ELX200-12P-EU | F.01U.326.044**

ELX200-12P-AP 12" 2-way powered speaker, AP

Powered 12-inch 2-way loudspeaker Asia-Pacific regions, black

Order number **ELX200-12P-AP | F.01U.326.047**

ELX200-12P-GL 12" 2-way powered speaker, Global, No BT

Powered 12 inch 2-way loudspeaker, two cords, No Bluetooth®, black

Order number **ELX200-12P-GL | F.01U.334.024**

ELX200-12P-W 12" 2-way powered speaker, white

12" 2-way powered speaker, white

Order number **ELX200-12P-W | F.01U.361.352**

Z.01X.000.119

Accessories

EBK1-M10-3PACK Forged M10 3pack short shank eyebolt kit

Forged M10 short shank eyebolt kit for ELX10/10P, ELX 12/12P, and ELX 15/15P, 3-pack, silver
Order number **EBK1-M10-3PACK | F.01U.327.889**

ELX200-12-CVR Padded cover for ELX200-12, 12P

Padded cover for ELX200-12/12P, black

Order number **ELX200-12-CVR | F.01U.326.066**

ELX200-BRKT Wall mount bracket, ELX200 2-way, black

Wall mount bracket for all ELX200 full-range models, black

Order number **ELX200-BRKT | F.01U.326.072**

ELX200-BRKT-W Wall mount bracket, ELX200 2-way, white

Wall mount bracket for all ELX200 full-range models, white

Order number **ELX200-BRKT-W | F.01U.361.514**

BRKT-POLE-L Wall mount bracket 12",15" 2-way speaker

Pole mount bracket for loudspeakers up to 15 inches, black

Order number **BRKT-POLE-L | F.01U.385.537**



<https://www.electrovoice.com>