



Description

The Rumble-KU315 is the most powerful passive subwoofer in the Rumble series, with a nominal rated power of 2000 W at 4 Ω. Made from water-resistant polyurea-coated birch plywood, this ultra-thin subwoofer features a 1x 15" neodymium transducer in a shallow and relatively slim box and is certified for marine applications.

Unlike other subwoofers, the KU315 doesn't have reflex openings but instead features two more 15" passive radiators that ensure the transducer excursion is as linear as possible with minimum residual noise. This design, along with durable materials and an upgrade to the SpeakOn NL4 connector, makes the Rumble-KU315 resistant to tough weather conditions and suitable for outdoor installations.

K-array's Kommander amplifiers are the perfect choice for powering any Rumble subwoofer, capable of balancing all the settings needed to match any mid-high speaker in the K-array catalog. With dedicated presets, integrators can find complete solutions within the same range of products. The KU315's extended frequency response, prodigious output and discrete form factor make it ideal for medium and large-format projects like clubs, lounges, theaters, cinemas, and auditoria.

Measuring 123 x 45 x 25 cm (48.4 x 17.7 x 9.8 in) and weighing 40 kg (88.18 lb), the KU315 is available in black or white and can be customized in any RAL colour to blend seamlessly into a variety of environments.

Models and customization available:

- KU315 - black model
- KU315W - white model
- KU315X - customisable colour (box + grille)

Main features

- Passive subwoofer
- 1x 15" neodymium magnet woofer
- 2 x 15" passive radiator
- 35 Hz - 150 Hz
- 137 dB (peak)
- 2000 W @ 4 Ω

Technical specifications	
Type	Passive subwoofer
Transducers	1x 15" neodymium magnet woofer 2 x 15" passive radiator
Frequency Response ¹	35 Hz - 150 (-6 dB)
Max SPL ²	138 dB (peak)
Rated Power	2000 W
Coverage	Omni
Nominal Impedance	4 Ω
Connectors	1x SpeakON NL4 1+1- signal - 2+2- not connected


Handling & Finishes	
Material	polyurea coated birch plywood
Colors	Black, White, Custom RAL
IP Rating ³	IP65
Dimensions (WxHxD) ⁴	(W x H x D): 1230 x 450 x 250 mm (48.4 x 17.7 x 9.8 in)
Weight	40 kg (88.18 lb)

¹ With dedicated preset.

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.

³ IP65KITB sealing accessory included in the marine product package

⁴ Removable rubber feet not included.

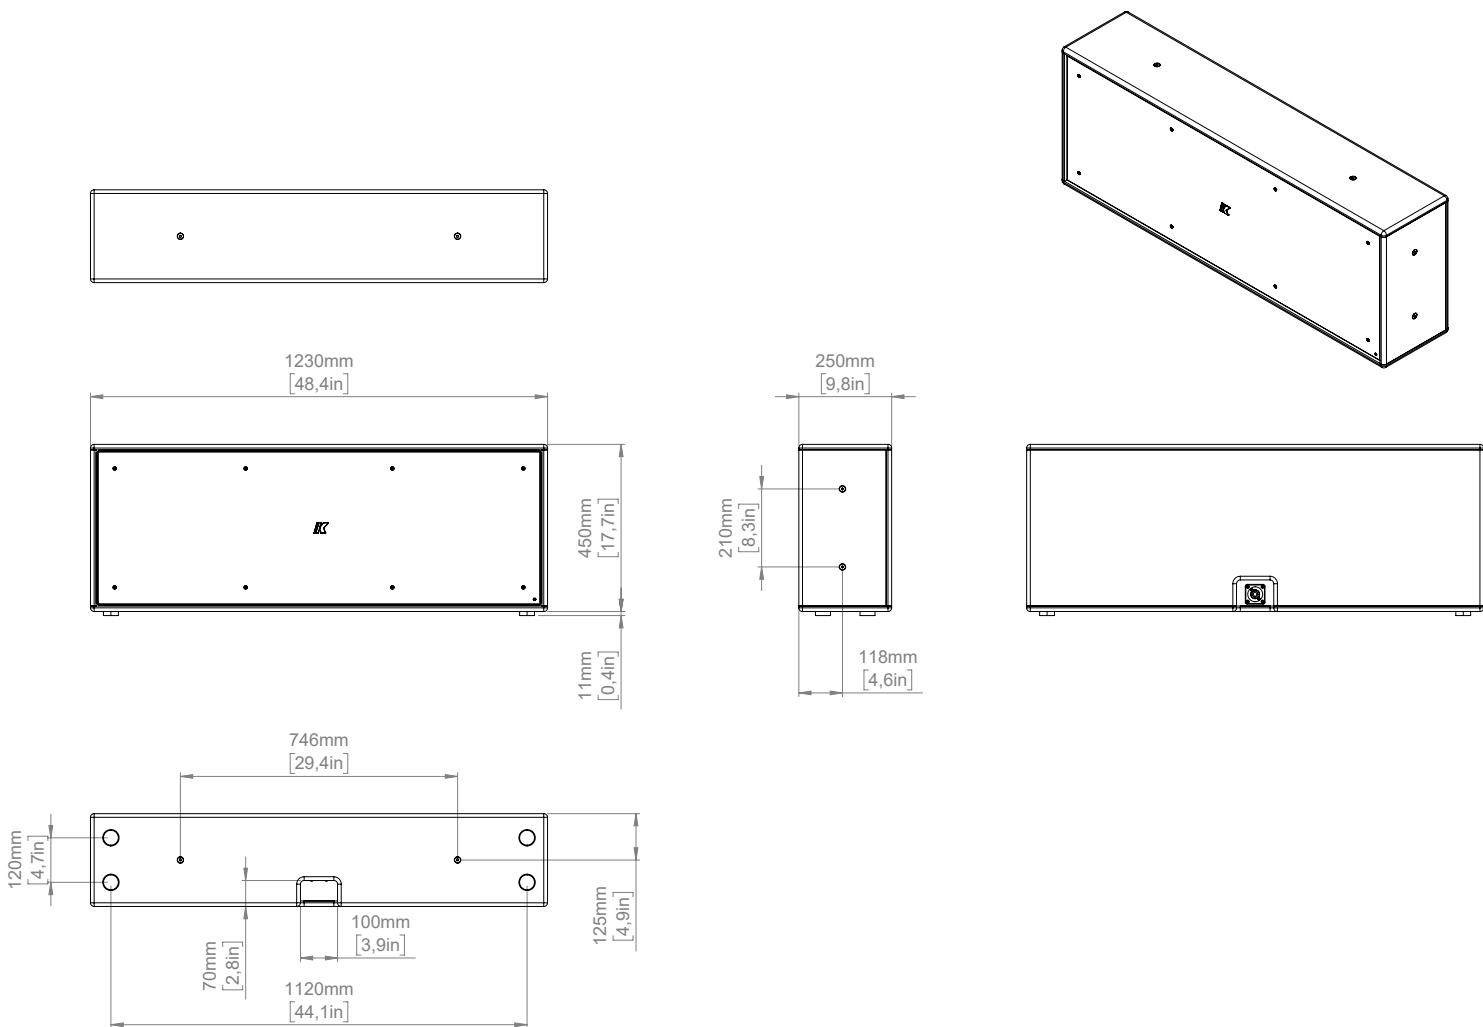

Notes:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.
New materials and designs are introduced into existing products without previous notice.
Present systems may differ in some respects from those presented in this catalog.