

# ND 10

## Passive full-range speaker




Premium ND series offers several solutions for any and all demanding sound applications. With the top-class transducers of own design and improved voice coil cooling, ND series allows for prolonged high-SPL operation while preserving clarity and intelligibility.

Passive models feature low-distortion crossovers with optimal transfer characteristics, which allows for controlled tuning with external amplification.

ND 10 is a passive full-range speaker, based on low-distortion 10" neodymium woofer and 1,5" neodymium HF driver. Small, transportation-friendly, lightweight all-neodymium speaker, the ND 10 adds immense value to any rental, touring rider or complete sound reinforcement set. It offers considerable power, smooth sonic performance, and compact dimensions.




### DIMENSIONS

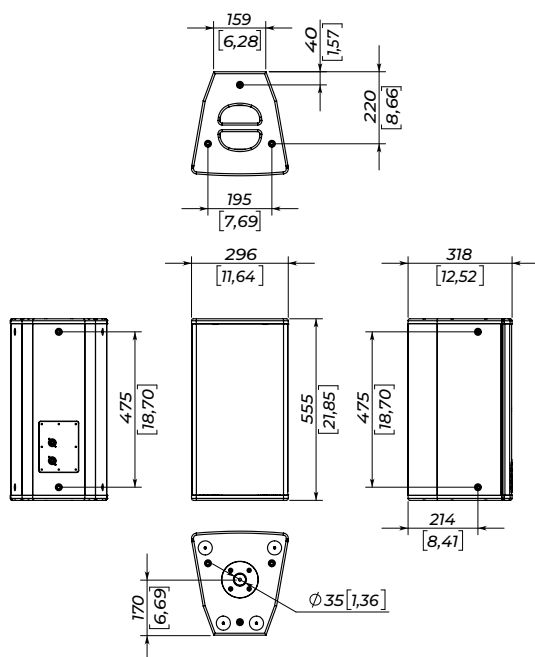


### ACCESSORIES



**AND12**  
Flying adapter




**LND10**  
Double bracket



**HND10**  
Horizontal bracket

### AMPLIFICATION

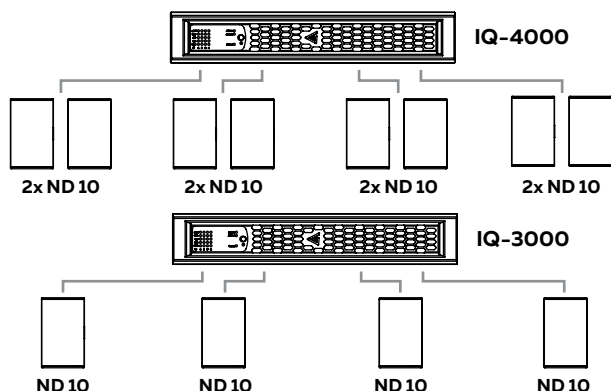

### SPECIFICATIONS

|                                |                                                                             |
|--------------------------------|-----------------------------------------------------------------------------|
| Frequency Response (-10dB)     | 55 - 19000 Hz                                                               |
| Max SPL <sup>1</sup>           | 133 dB                                                                      |
| Sensitivity (1W/1m)            | 97 dB                                                                       |
| LF Driver                      | 10", 3" VC                                                                  |
| HF Driver                      | 1,5", 2,8" VC                                                               |
| Nominal Coverage Angle (H x V) | 80 x 70 deg                                                                 |
| Impedance                      | 8 Ohm                                                                       |
| Nominal power <sup>2</sup>     | 500 W                                                                       |
| Connectors                     | 2 x Neutrik Speakon                                                         |
| Dimensions (W x H x D)         | 296 x 555 x 318 mm / 11.64" x 21.85" x 12.52"                               |
| Weight (Net/Shipping)          | 19 kg / 21 kg                                                               |
| Mounting options               | M10 mounting points<br>35mm pole socket<br>Carrying handles<br>Plastic feet |
| Enclosure material             | Plywood, wear-resistant paint                                               |
| Speaker protection             | Steel grill, acoustically transparent backing                               |

<sup>1</sup> - pink noise, filtered according to AES 2 - 2012, crest factor 9 dB

<sup>2</sup> - based on transducer power measured according to AES 2 - 2012

### CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input power ratings mentioned in specifications while exploiting the speaker system.

Speaker system comes with two Neutrik® Speakon heavy duty sockets for easy connection.

|                             |                                   |
|-----------------------------|-----------------------------------|
| Signal +                    | 1 +                               |
| Signal -                    | 1 -                               |
| High pass filter:           |                                   |
| Freq, no less than          | 60 Hz                             |
| Order, no less than         | 18 dB/oct                         |
| Recommended amplifier power | 500 - 1000 W on nominal impedance |

### SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.
2. Do not use speaker system with damaged speakON or speaker cable so as not to cause electric shock hazard or fire hazard.
3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).
4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.
5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.