



MXA NETWORK MUTE BUTTON

OVERVIEW

The MXA Network Mute Button is a configurable PoE-powered mute button accessory designed for Shure networked audio products, including Microflex® Advance™ Array Microphones as well as the IntelliMix® P300 and IntelliMix Room DSPs, and ANIUSB-MATRIX. One or many of the low-profile touch sensitive mute buttons can be configured to mute one or multiple microphones, depending on user needs or room configurations.

FEATURES

- Designer System Configuration software for easy setup and configuration
- SystemOn™ Asset Management for remote management & troubleshooting
- PoE powered
- Compatible with third party control systems via programmable control strings
- LED status ring with configurable colors and brightness
- Configurable as toggle, push to talk and push to mute functionality
- IPX1 rated
- Easy table installation in 1" (25mm) or 7/8" (22mm) holes
- Available with or without microphone icon

SPECIFICATIONS (subject to change)

ELECTRICAL

Connector Type	RJ45, 8-pin power cable
Cable Requirements	Cat 5e or higher (shielded cable recommended)
Power Requirements	Power over Ethernet (PoE), Class 1
Power Consumption	2 W, maximum
Control Software	Shure Designer
Ingress Protection Rating	IEC 60529 IPX1 Water Protected

MECHANICAL

Operating Temperature Range	-6.7°C (20°F) to 40°C (104°F)
Storage Temperature Range	-29°C (-20°F) to 74°C (165°F)


DIMENSIONS (H x W x D)

Base	3.74 x 3.74 x 1.06 in. (94.96 x 94.96 x 27.04 mm)
Mute Button	1.54 x 1.54 x 0.2 in. (39.02 x 39.02 x 5.02 mm)
Mute Button Tube	0.87 x 0.87 x 3.03 in. (22 x 22 x 76.98 mm)
Grommet	1.97 x 1.97 x 0.31 in. (49.97 x 49.97 x 8 mm)
Spacer	1.93 x 1.93 x 0.05 in. (49 x 49 x 1.2 mm)

AVAILABLE MODELS

MXA-NMB	Network Mute Button
MXA-NMB/BLANK	Network Mute Button No Icon

Data subject to change without notice in interest of product improvements.

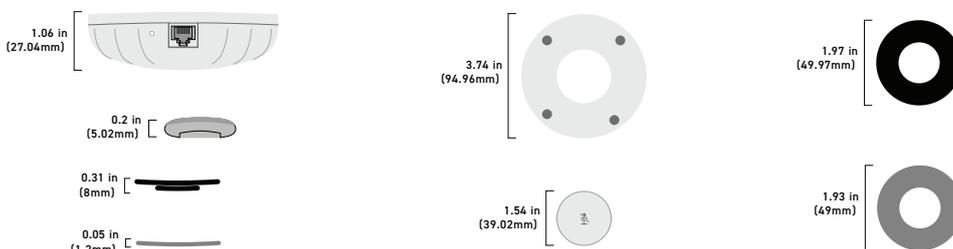

MXA MUTE (no mic icon)
flush mounted in table



MXA MUTE front view



MXA MUTE rear view

