


PRO 3 ... UP

program selectors fitting to switch boxes

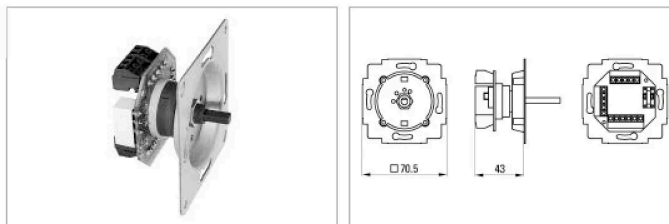

Program selector switch, e.g for restaurants, shops, ... The PRO 3 UP features a rotary dial without limit stop for 6 programmes. Also available with an optional mandatory relay. The metal support plate is screwed onto a standard flush-mounted box 63 mm in depth. It comes preconfigured for Venetian blind cover plates with rotary knob for the particular switch program. These parts can be obtained from any electrical wholesaler. For exact order data according to the switch program please refer to the table at the end of this chapter.

Technical Datas		Pro 3... UP	
Mandatory Relais Voltage	24 V		
Mandatory Relais Current	0.012 A		
depth	43 mm		
Component Set	12 steps for 6 programs without stopper		

model	order-no.	version	pack. unit
PRO 3 BE UP	115-003-02-200-20	6 programs, 12 steps, fitting to: Berker ARSYS, B.1, B.3, B.7, K.1, K.5, Modul 2, S.1 and Twinpoint.	1
PRO 3 BE UP-R	115-003-02-200-21	6 programs, 12 steps with mandatory relay, fitting to: Berker ARSYS, B.1, B.3, B.7, K.1, K.5, Modul 2, S.1 and Twinpoint.	1
PRO 3 BJ UP	115-003-02-200-10	6 programs, 12 steps, fitting to: Busch-Jaeger alpha nea, alpha exclusive, axcent, Busch-Duro, carat, future, future linear, impuls, Reflex SI and solo.	1
PRO 3 BJ UP-R	115-003-02-200-11	6 programs, 12 steps with mandatory relay, fitting to: Busch-Jaeger alpha nea, alpha exclusive, axcent, Busch-Duro, carat, future, future linear, impuls, Reflex SI und solo.	1
PRO 3 GE UP	115-003-02-200-30	6 programs, 12 steps, fitting to GIRA System 55, E2, Event, Esprit and Standard 55.	1
PRO 3 GE UP-R	115-003-02-200-31	6 programs, 12 steps with mandatory relay, fitting to GIRA System 55, E2, Event, Esprit and Standard 55.	1
PRO 3 GMP UP	115-002-02-200-30	6 programs, 12 steps, fitting to GIRA Edelstahl, S-Color as well as Merten System M, 1-M, Atelier-M, M-Smart, M-Plan, M-Arc, M-Star, Antik/Fläche, Atelier, Artec, M1, OctoColor, Hager Kallysto, Exclusiv-Design, as well as PEHA AURA, DIALOG, STANDARD.	1
PRO 3 GMP UP-R	115-002-02-200-31	6 programs, 12 steps with mandatory relay, fitting to GIRA Edelstahl, S-Color as well as Merten System M, 1-M, Atelier-M, M-Smart, M-Plan, M-Arc, M-Star, Antik/Fläche, Atelier, Artec, M1, OctoColor, Hager Kallysto, Exclusiv-Design, as well as PEHA AURA, DIALOG, STANDARD.	1
PRO 3 JU UP	115-002-02-200-50	6 programs, 12 steps, fitting to JUNG A 500, AS 500, A Creation, CD 500, CD plus, Edelstahl, LS 990, SL 500, Hager Kallysto, Exclusiv-Design, as well as ELSO FASHION, NOVIA, SCALA.	1
PRO 3 JU UP-R	115-002-02-200-51	6 programs, 12 steps with mandatory relay, fitting to JUNG A 500, AS 500, A Creation, CD 500, CD plus, Edelstahl, LS 990, SL 500, Hager Kallysto, Exclusiv-Design, as well as ELSO FASHION, NOVIA, SCALA.	1